

Pultruded Fiberglass Ballistic Entrance Estimate/Order Form



Door(s) & Frame(s)
 Door(s) only
 Frame(s) only

1. Door Mark (I.D.): _____

Building Type: _____

2. Handing:
 Single
 Pairs
 Unequal Pair

(Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

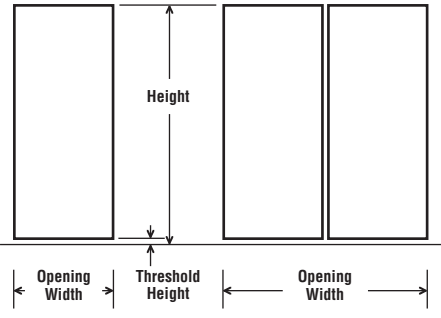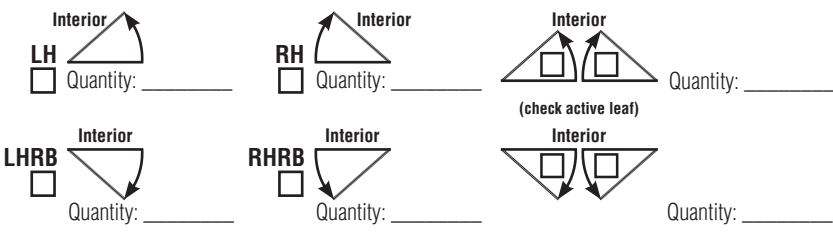

Required Clearances: Pairs: 1/4" center, 3/8" if continuous gear hinge, 1/8" if butt hinge

3. Door Net Size: Maximum Net Door Height is 96" Thres. Height: _____ (max & default bottom undercut: 3/4")

31-3/4" width x _____ height
 35-1/2" width x _____ height
 35-3/4" width x _____ height
 41-3/4" width x _____ height
 47-3/4" width x _____ height

4. Door Color:

White Blue Green Black Red
 Clay Tan Grey Yellow Brown Orange
 Primed Only Custom Color: _____

5. Door Bottom: Flush Bottom

6. AF-BR³LK
 Glazing by S-L
 Glazing by others
 None

12" x 12"
 Half Lite
 Double Lite
 Narrow Lite
 Full Lite

Other (specify): _____
 Caution: May interfere with exit device mounting.

7. Glass Type & Glass Thickness: UL-752 Level 3 Rated Glazing in AF-BR³ LK - 1.25" Lite Kit w/minimum 1" glazing bite

EX1300 (Default)
 LTI Smartguard BR³
 Hygard BR1250

8. AF-150 BR³ FRP Frames: For anything other than an immediate door frame consult Special-Lite

KD Frame Welded Frame

(Paint matches door)

5-3/4" depth x 2" face Contact Special-Lite to verify if framing configuration allows for this option. **Addl. freight applies**
 2" Head Face 4" Head Face
 Sidelite (Max size: 18" wide x 96") - attach sketch
 Frame ONLY - Net width: _____ Net height: _____

Door Mark (I.D.): _____

9. Anchor Type: AF-150 BR³ Concrete/Block Anchorage ▼

Existing Concrete/Block
Punch & Dimple

10. Threshold (By S-L) None Pultruded FRP "Saddle Style" Pultruded FRP "Latch Track"
(Default bottom undercut is 3/4")

11. Frame Install Kit: (Tapcon stainless steel fasteners and composite frame shims) Yes No

12. Continuous Hinge by Special-Lite: (SL-11LL) Yes No

13. Hardware for Pairs: Ballistic Astragal Ballistic Mullion

14. Hardware: *Field installed/Prep per template if applicable/All hardware must be through bolted*
Note: No CVR's, SL-301 or electric raceway

Quantity	Manufacturer	Item#	Size	Finish

15. Special Instructions or Required Performance Specification(s): (enter below)

(If your order has specific performance requirements to meet, such as ballistic, blast, hurricane, wind load, thermal, etc., please note it here.)